

Technical Information

MULTI SPOT

Product Category: **C 5**

Blending thinner

Fields of use

Blending thinner designed to melt in fade-out areas of UNO HD CP / UNO HD CP PLUS and R-M clears in blend-in repairs.

Additional Information

MULTI SPOT reduces polishing time and promotes better leveling of the clearcoat in the blending areas.

Technical characteristics

Solids content 4 % \pm 2	Density 0.830– 0.930 g/cm ³
Storage temperature min. 5°C to max. 45°C	Shelf life 36 months

Application

Substrate / Pre-treatment / Cleaning


See process described in "UNO HD CP / UNO HD CP PLUS Blending" B 2, B 2.2, B 2.3.






The data contained in this publication are based on our current knowledge and experience. In view of the many factors that may affect processing and application of our products, these data do not relieve processors from carrying out their own investigations and tests; neither do these data imply any guarantee of certain properties, nor the suitability of the products for a specific purpose. Any descriptions, drawings, photographs, data, proportions, weights etc. given herein are for general information purpose only; they may change without prior information and do not constitute the agreed contractual quality of the products (product specification). The latest version supersedes all previous versions. You can obtain the latest version from our website at www.mpaint.com or directly from your sales partner. It is the responsibility of the recipient of our products to ensure that any proprietary rights and existing laws and legislation are observed.

R-M Automotive Refinish Paints, Z.I. du Merret F-60676 Clermont de l'Oise Cedex, Tel. (+33) (0) 3 44 77 77 77, 11/2017

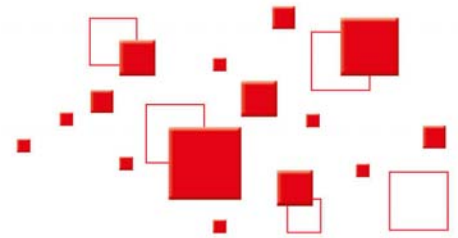

MULTI SPOT



	Tinted version		Untinted version	
	MULTI SPOT	5% by vol.	MULTI SPOT	100% by vol.
	UNO HD CP / UNO HD CP PLUS color RFU	1% by vol.	H 9000	2% by vol.
	Viscosity at 20°C:			
	ISO 4 cup:	15 to 17 seconds		
	DIN 4 cup:	12 to 13 seconds		
	Potlife: 1 hour at 20°C			
	HVLP gravity-feed spraygun	1.3 – 1.5 mm	0.7 bar at the nozzle	
	Compliant gravity-feed spraygun	1.3 – 1.4 mm	2.0 – 2.5 bar	
	Number of spraycoats:	2 – 3		
	Film thickness:	10 µm		
	Drying at 60°C	30 min.		

Finishing

See process described in "UNO HD CP / UNO HD CP PLUS Blending" B 2, B 2.2, B 2.3.

Safety instructions

It cannot be ruled out that this product contains particles < 0.1 µm.

The products are suitable for professional use only.

For the use of this product please adhere to the actual safety recommendations and the personal protective equipment.